

PAD Bio<sup>ethanol</sup>

PAUL AGNEW | DESIGNS<sup>®</sup>

info@paulagnewdesigns.com | www.paulagnewdesigns.com



# PAD Bio<sup>ethanol</sup>

At Paul Agnew Designs, we believe in enhancing every environment with sophisticated, eco-friendly fire solutions.

Our Bio ethanol range makes it easy to add the charm of real flames to your home or commercial setting without needing a gas line, chimney, or complex installation.

Our range fits seamlessly into indoor and outdoor designs, offering flexibility and unmatched ambiance.

**Elegantly Engineered Burners** with our specialized burner trays hold bio-ethanol fuel securely, creating a captivating and safe clean flame.


**Effortless Installation**, the PAD Bio ethanol range require no chimney or venting, making them easy to install in any space. Enjoy a clean, smoke-free flame effortlessly.

**Modern & Stylish** and crafted from durable stainless steel with optional top finishes, our ethanol burners offer elegance and efficiency without the mess of traditional fireplaces.

**Safety is at the core of the PAD Bio-Ethanol range**, which is equipped with child locks, sleep timers, and an advanced auto-fill system that eliminates the manual fuelling. Bio-ethanol is drawn from an external container and pumped directly into the burner with precision. Integrated sensors automatically stop the flow when the tank is full, preventing overfilling and spills. Designed by Paul Agnew Designs, this system delivers safe and seamless performance.

**Warmth Anywhere.** Bring cozy warmth and timeless style to any room with Paul Agnew Designs' eco-friendly, ventless ethanol fireplaces.

## PAD Bio dimensions

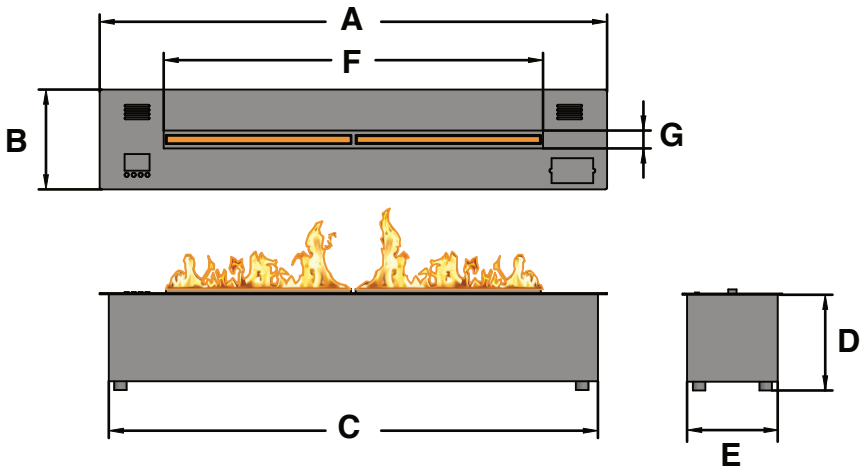

| MODEL     | A    | B   | C    | D   | E   | F    | G  | WEIGHT (KG) |
|-----------|------|-----|------|-----|-----|------|----|-------------|
| PAD-B-50  | 500  | 240 | 476  | 230 | 216 | 334  | 47 | 18          |
| PAD-B-66  | 680  | 240 | 636  | 230 | 218 | 434  | 41 | 22          |
| PAD-B-80  | 820  | 240 | 776  | 230 | 218 | 512  | 41 | 27          |
| PAD-B-100 | 1020 | 240 | 976  | 230 | 218 | 712  | 41 | 29          |
| PAD-B-110 | 1120 | 240 | 1076 | 230 | 218 | 812  | 41 | 33          |
| PAD-B-120 | 1220 | 240 | 1176 | 230 | 218 | 912  | 43 | 36          |
| PAD-B-130 | 1320 | 240 | 1276 | 230 | 218 | 1012 | 43 | 40          |
| PAD-B-140 | 1420 | 240 | 1376 | 230 | 218 | 1112 | 43 | 44          |
| PAD-B-150 | 1520 | 240 | 1476 | 230 | 218 | 1212 | 43 | 48          |
| PAD-B-180 | 1820 | 240 | 1776 | 230 | 218 | 1512 | 43 | 58          |
| PAD-B-210 | 2100 | 240 | 1976 | 230 | 218 | 1712 | 43 | 68          |
| PAD-B-250 | 2500 | 240 | 2376 | 230 | 218 | 2112 | 43 | 78          |

### HOUSING DIMENSIONS

The minimum housing cavity opening requirements

CW - C + 10mm

CH - D + 15mm

CD - E + 10mm

- ★ CW - Cavity Width;CH - Cavity Height; CD - Cavity Depth
- ★ The housing is designed solely for the unit and requires additional space for the electrical components.
- ★ Please refer to the installation manual for more details.
- ★ All dimensions are given in mm

