


Aerion Range

Vue 1250 Bay

SPECIFICATION SHEET

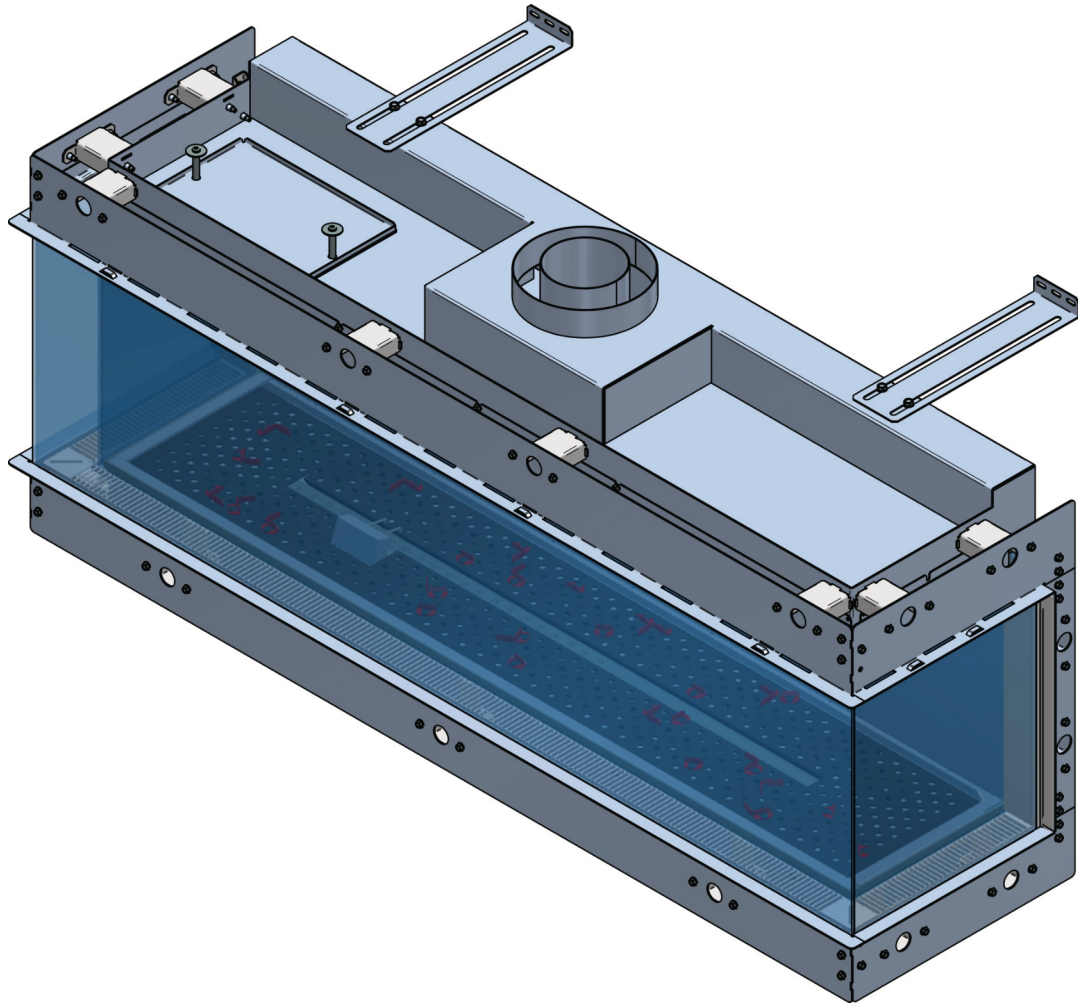

Version 3 01/10/24

Contents of manual may be updated without notice.


For the latest version of this manual please refer
to our website: www.livingfire.com.au

PAUL AGNEW | **DESIGNS**

VUE 1250 BAY

APPLIANCE DIMENSIONS

Product Code: G1250 GF3

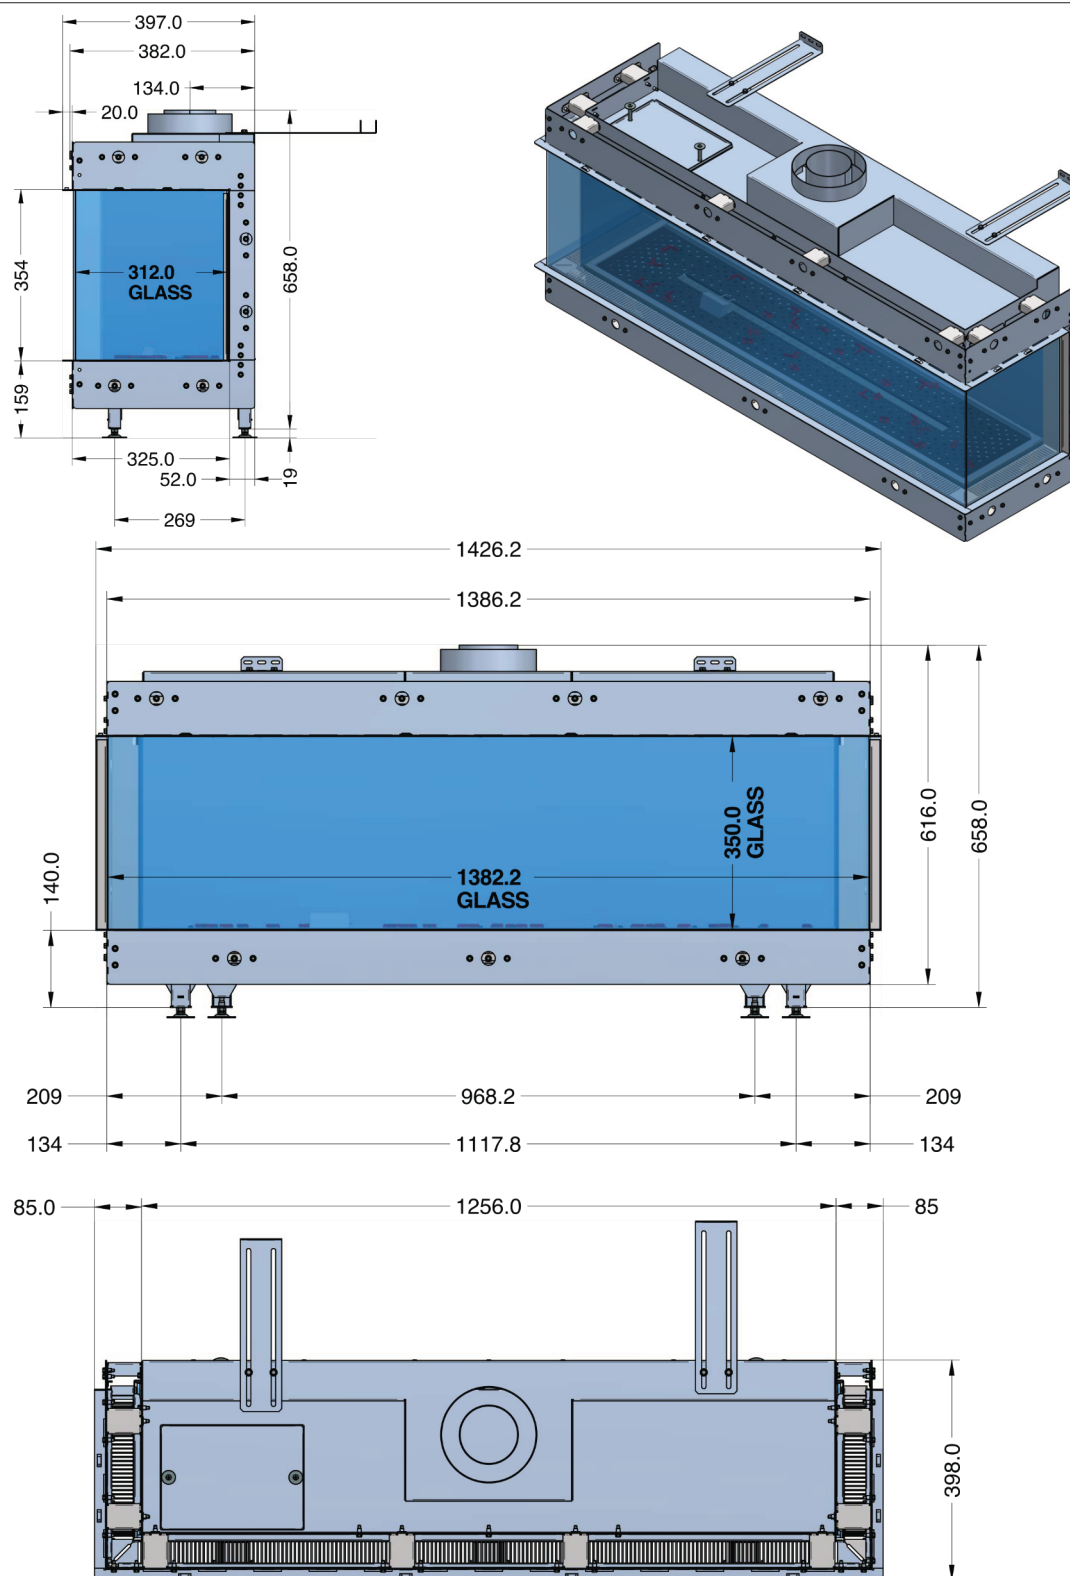

Note:

The lip around unit is 20mm thick.

VUE 1250 BAY

CONVECTION HEAT

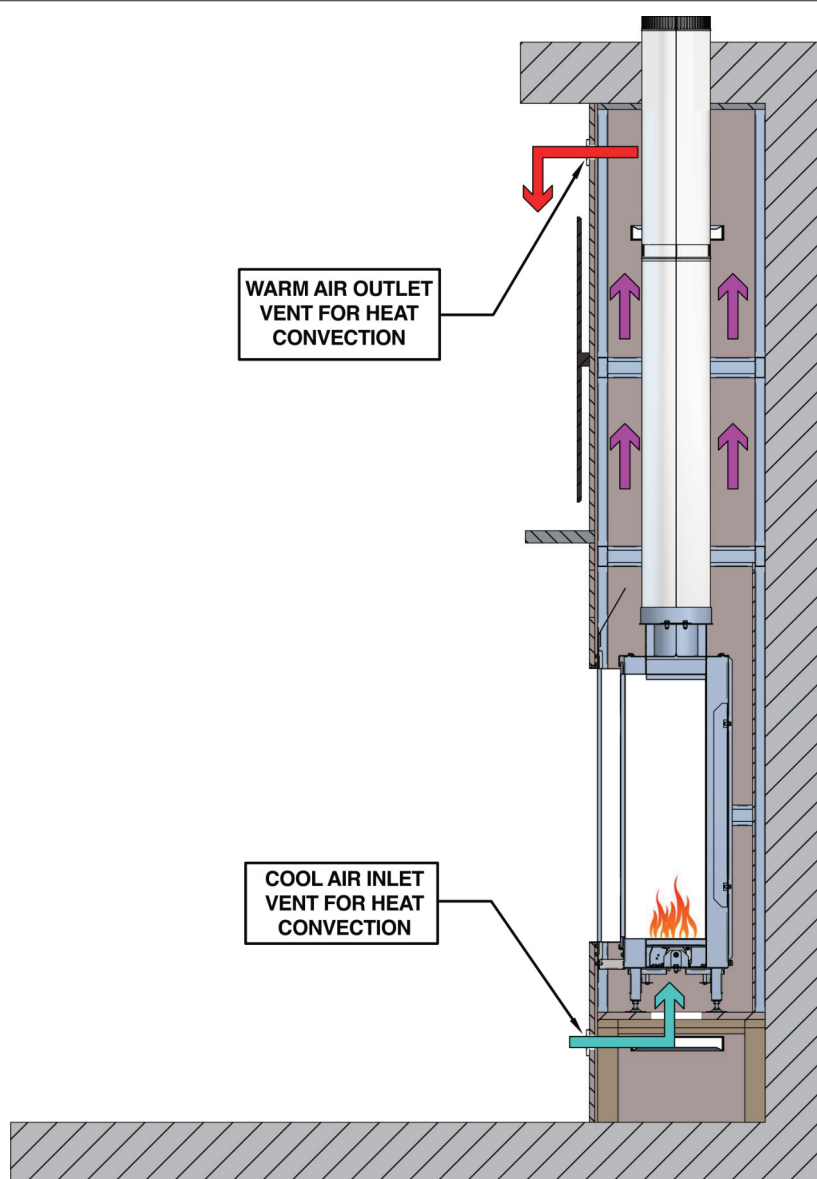


Figure 1.1 (Convection heat through vents)

Overall Design:

- One of the many features of the Paul Agnew Designs gas fireplaces is its use of convective air flow.
- As the air within the enclosing walls, or chase, is warmed by the fireplace it rises and then exits the convection air outlets. The warm air in the chase is then replaced by room air which enters through the room air inlets which are situated at the bottom of the enclosure. As this warm air cool, it falls toward the floor where it's drawn into the inlet and the cycle repeats.
- The room air inlets are part of the fireplace and cannot be blocked.
- As seen in the next page, the outlets may be placed in a number of locations to accommodate different structures/designs. In all cases, the design must allow for free flow air through the chase/enclosure.

VUE 1250 BAY

VENT LOCATIONS AND SIZES

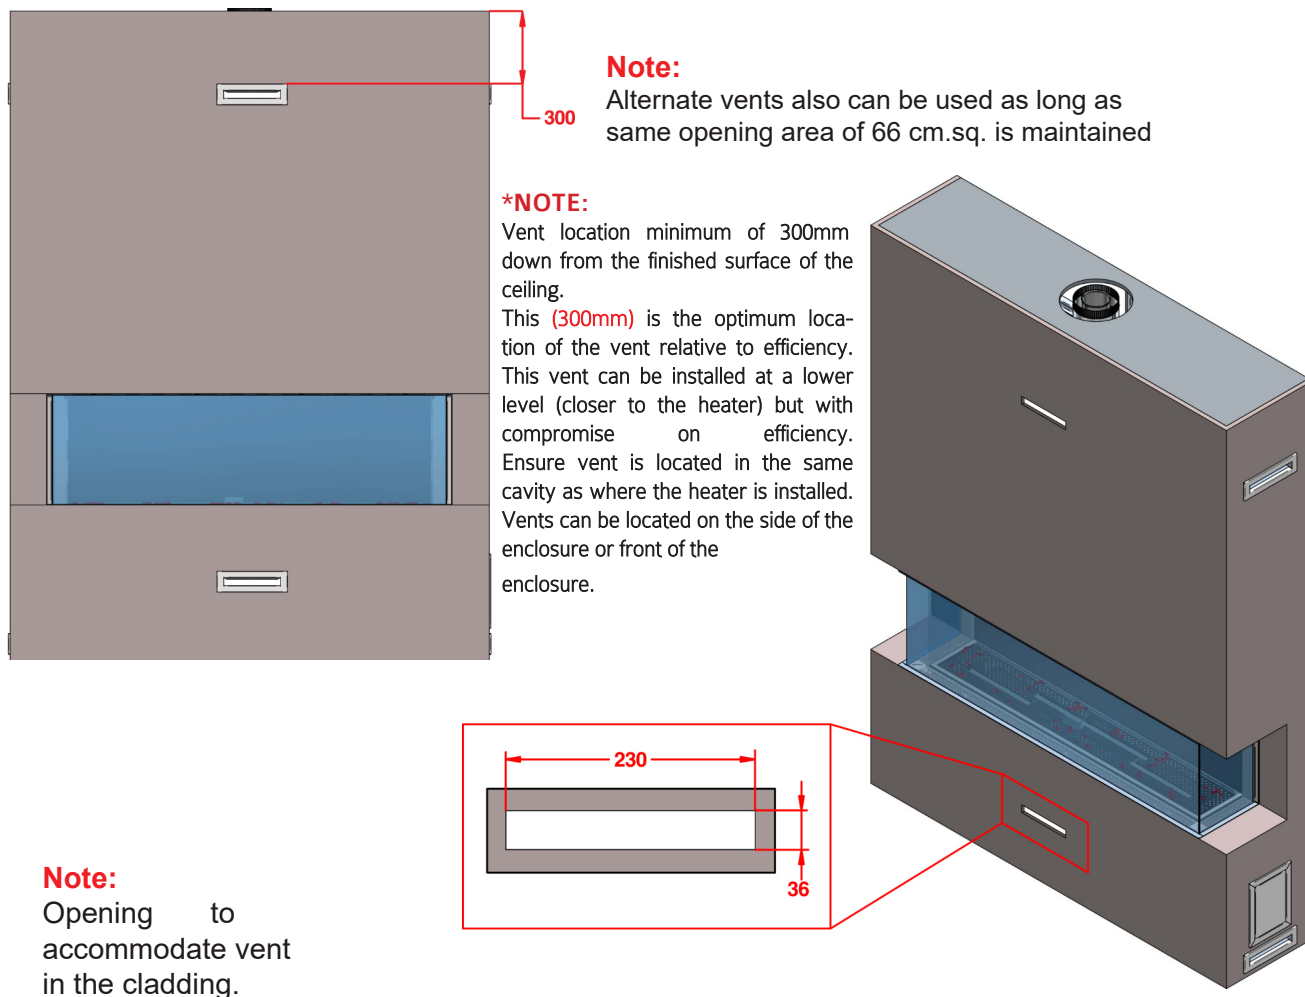


Figure 1.2 (Vents)

NOTE:

Standard Vent Size:

271x81mm

Standard Vent Opening:

218x30mm

For Timber/ Steel Frame:

x 4 vents are provided.

The use of the x 4 vents will ensure efficient heat distribution.

* Vent sizes can be customised.

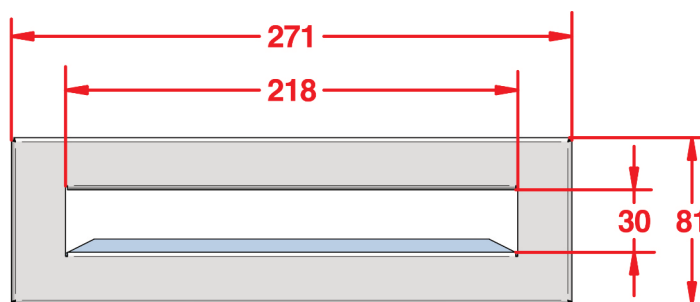


Figure 1.3 (Vent Size)

VUE 1250 BAY

UNIT TO TV CLEARANCES & COMBUSTIBLE MANTLE

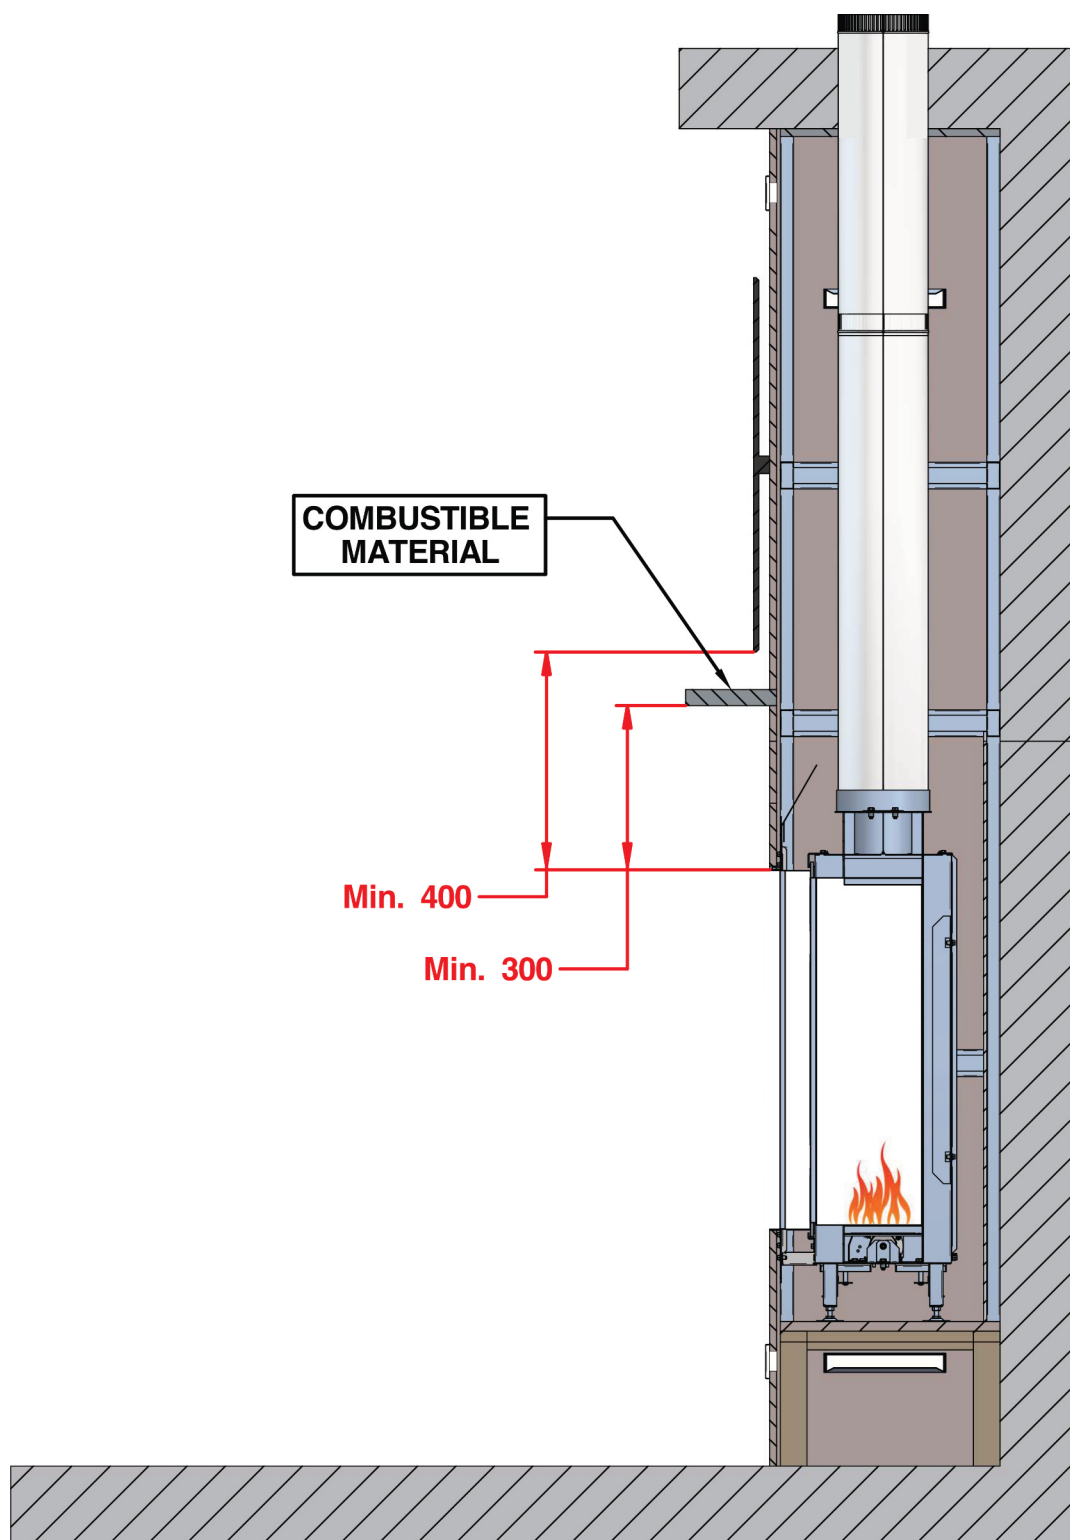


Figure 1.4 (Clearance from Unit to TV)

VUE 1250 BAY

CONTROL PANEL

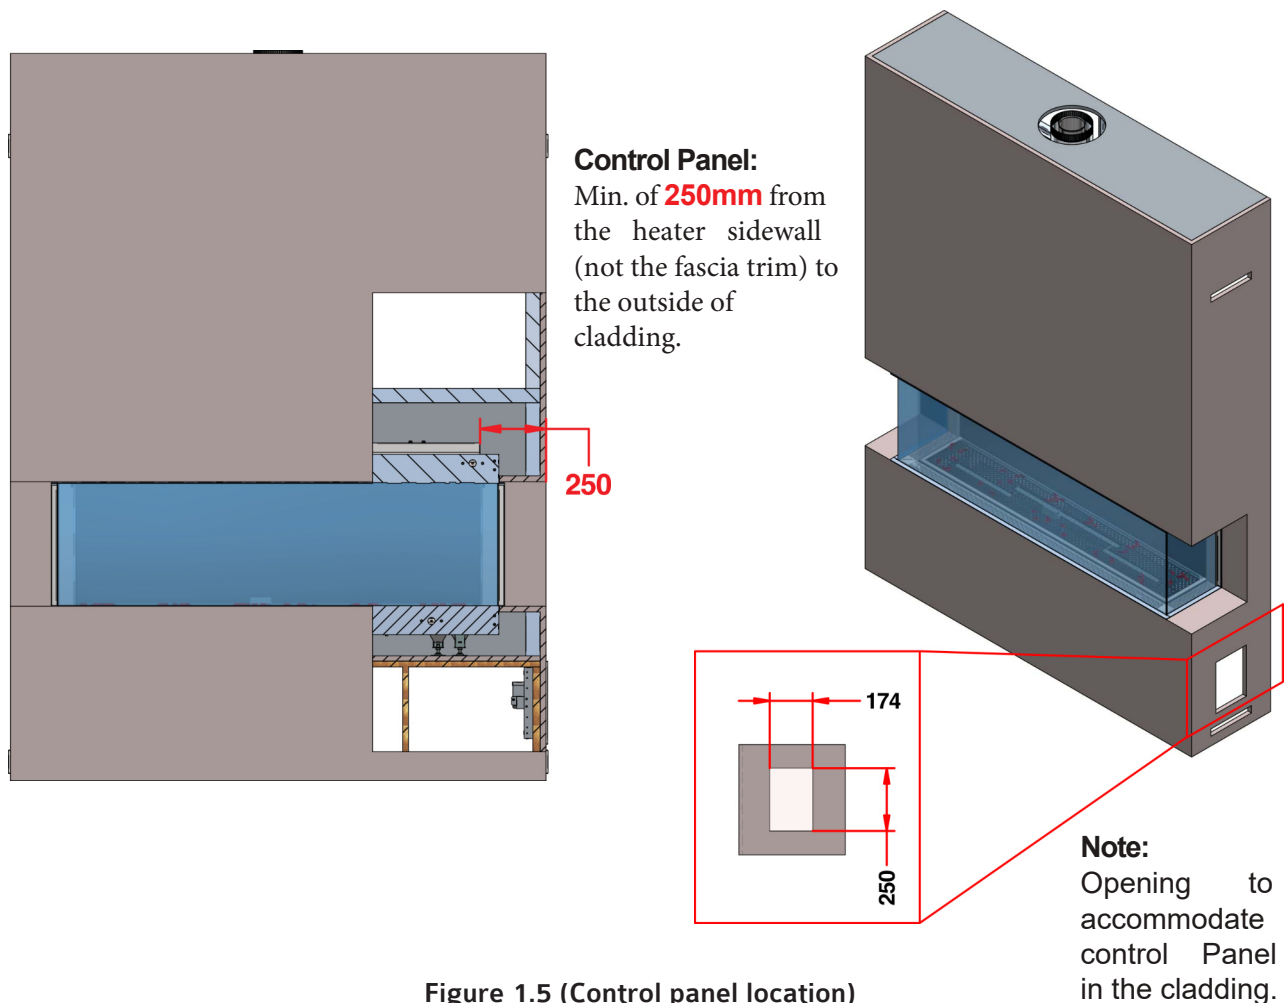


Figure 1.5 (Control panel location)

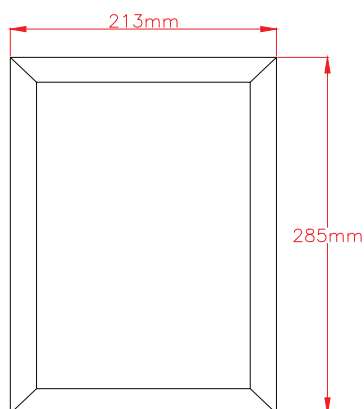


Figure 1.6
(Control Panel external Dimension)

Control Box Installation:


Timber/ Metal Installation:

Heater stands on support legs that sit on framing/floor which provide sufficient clearance for airflow. If unit is mounted on floor, control panel can only be located to the side with the minimum clearance of 250mm to the side. If underneath the unit, base will need to be at a desired height for the unit but also allowing the control box to be located underneath. Please refer to dimensions of each unit.

VUE 1250 BAY

CONTROL PANEL & VENT POSITION

POSSIBLE LOCATION OF CONTROL PANEL AND VENTS

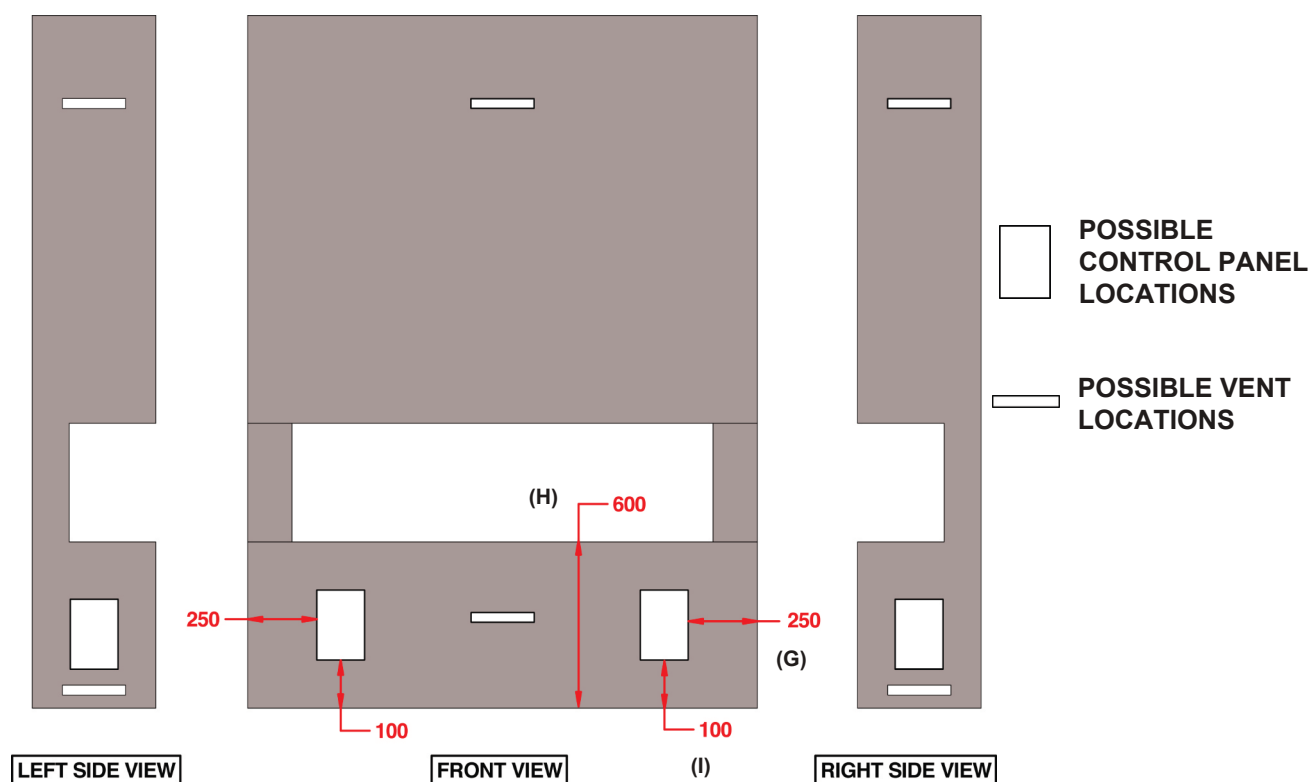


CLEARANCE DETAILS

- G** - Minimum clearance between panel opening to side of the cladding (250mm)
- H** - Minimum height between floor level to Heater front window lip (600mm)
- I** - Minimum clearance between floor level to panel (100mm)

Note:

G, H & I dimension is only applicable if the control panel is installed directly below the appliance.

Please refer Pg.5 if the control panel is installed to the side of the cavity.

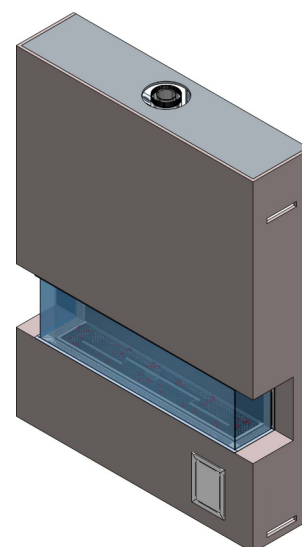

VUE 1250 BAY

TIMBER FRAMING - CLADDING MATERIAL

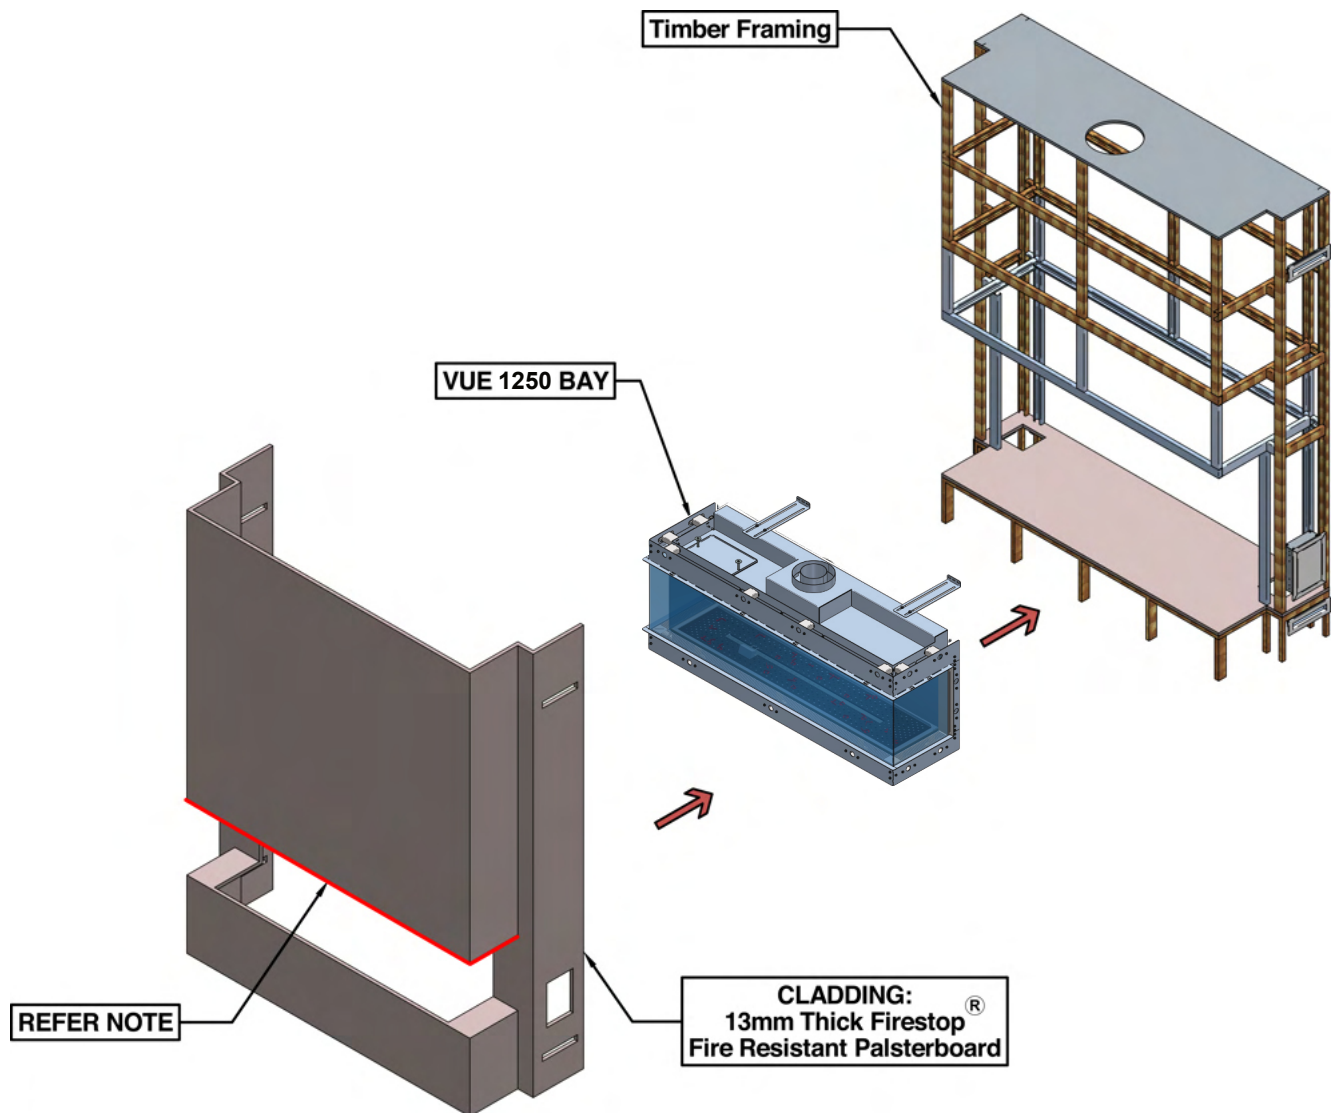


Figure 1.6 (Cladding Material)

Note:

A gap of 5mm needs to be left between the plasterboard and the top part of the firebox.
9mm Villa Board can be used as an alternative approved cladding material.


VUE 1210 BAY

TIMBER FRAME

Timber framing part details which includes control panel (x1), vent (x4), base board, metal infill around heater unit and timber studs.


Cladding need to be build around the frame having the heater unit inside the cavity of the timber frame.

Please refer to Pg. 8 for specification to build the timber frame, dimensions specified are of minimum requirements.

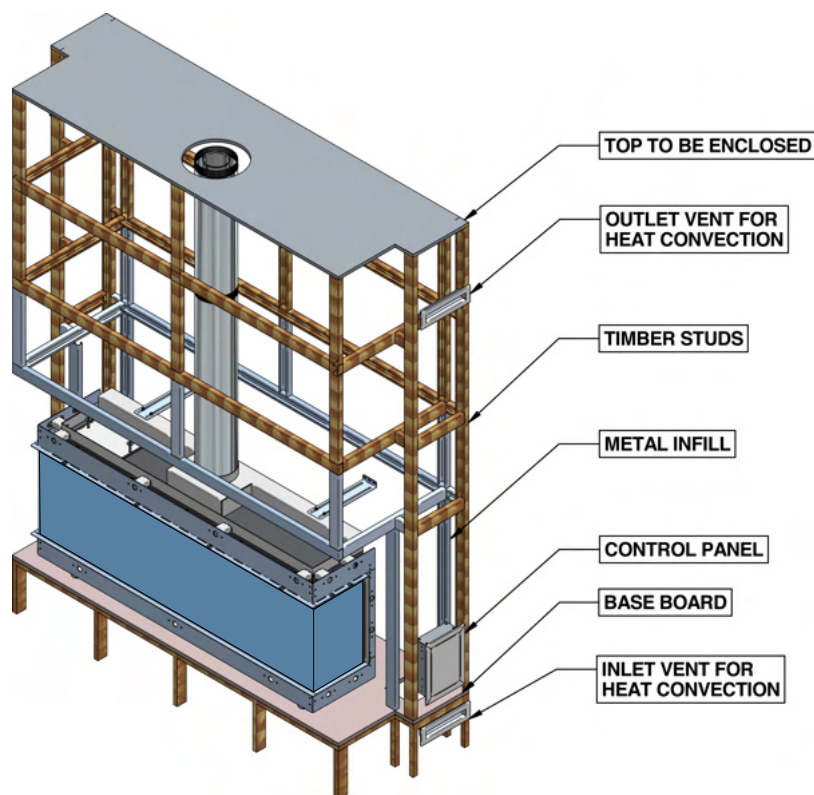


BASE BOARD:

Base board need to have minimum opening of 200x150mm on each side as specified, with minimum thickness of 18mm.

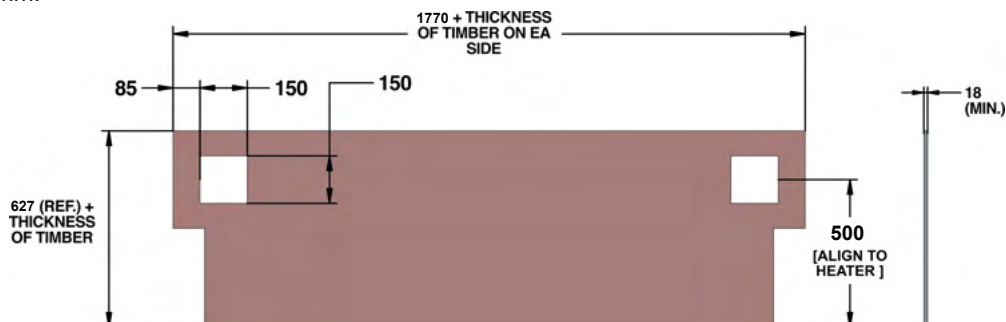

TOP ENCLOSURE:


Top enclosure need to have opening of diameter 270mm in alignment for flue line as specified.

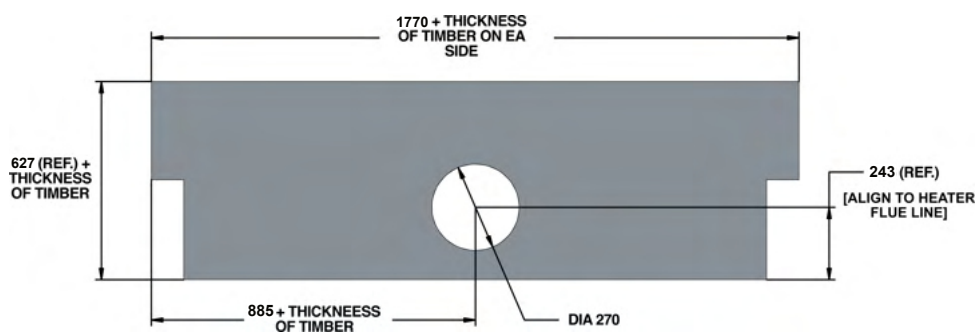

VUE 1250 BAY

TIMBER FRAME

Figure 1.8 (Timber framing)

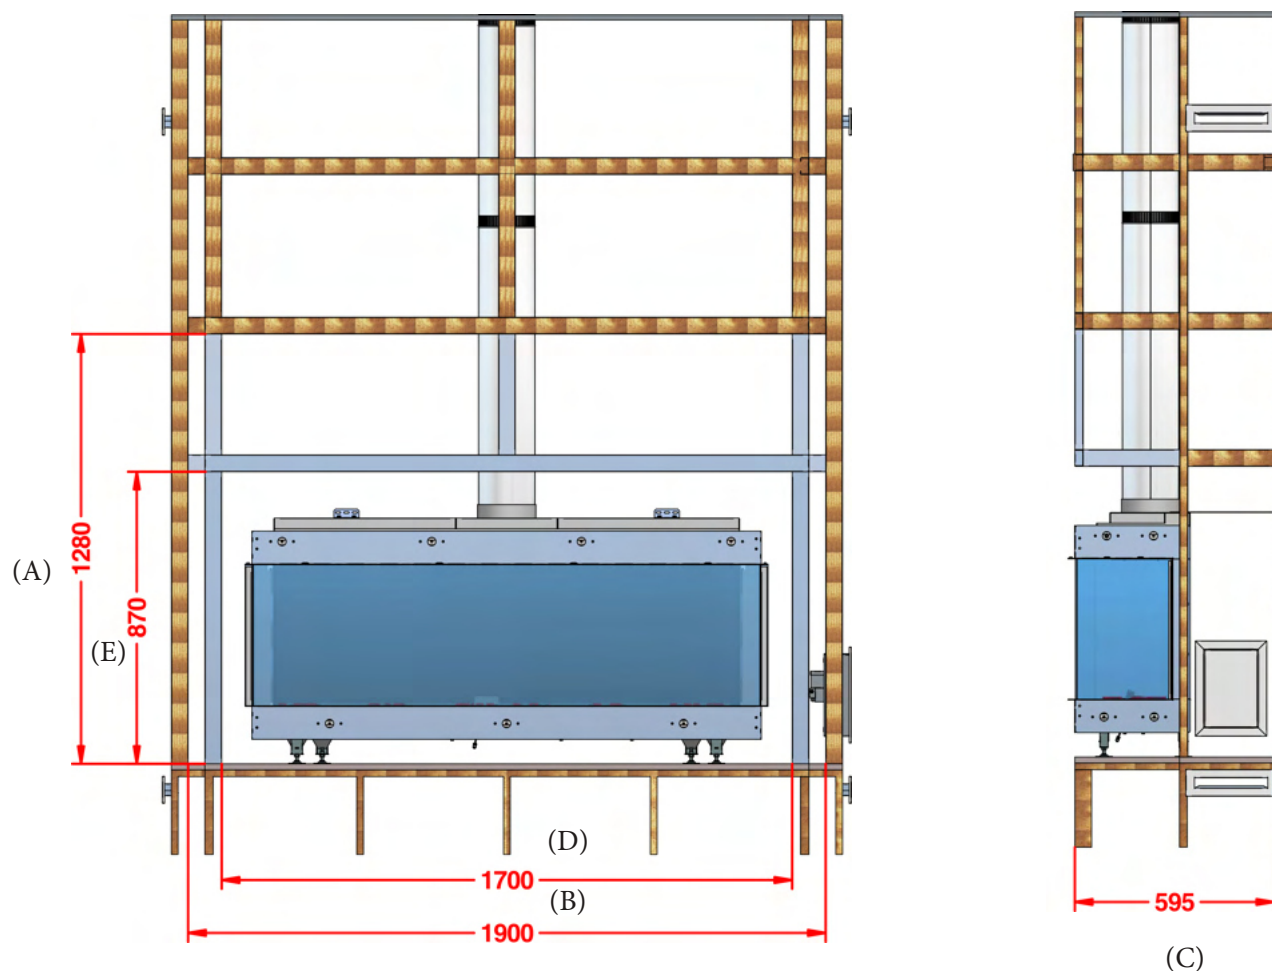

CLEARANCE TO COMBUSTIBLES

Fireplace Dimensions			Timber Frame			Metal Studs Infills to be in-stalled after Unit is in place (Clearance between unit and metal stud infill)		Option for smaller depth clearance: Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +6mm Villa Board + 50mm air gap to unit
In mm			Clearance to Combustibles in mm			Installation dimensions in mm		
			Unit Height +500mm top	Unit Width +250mm each side	Unit Depth +250mm to back	Unit Width +150mm either side	Unit Height +90mm top	Unit Depth + 81mm
H	W	D	A	B	C	D	E	C*
677	1400	345	1177	1900	595	1700	870	426

Note:

Please refer to Pg. 3 for specifications regarding Vents and pg. 5 for Control Panel specifications.

C* Please refer to Pg. 11 for pictorial representation and specifications.

VUE 1410 BAY

METAL FRAMING - CLADDING MATERIAL

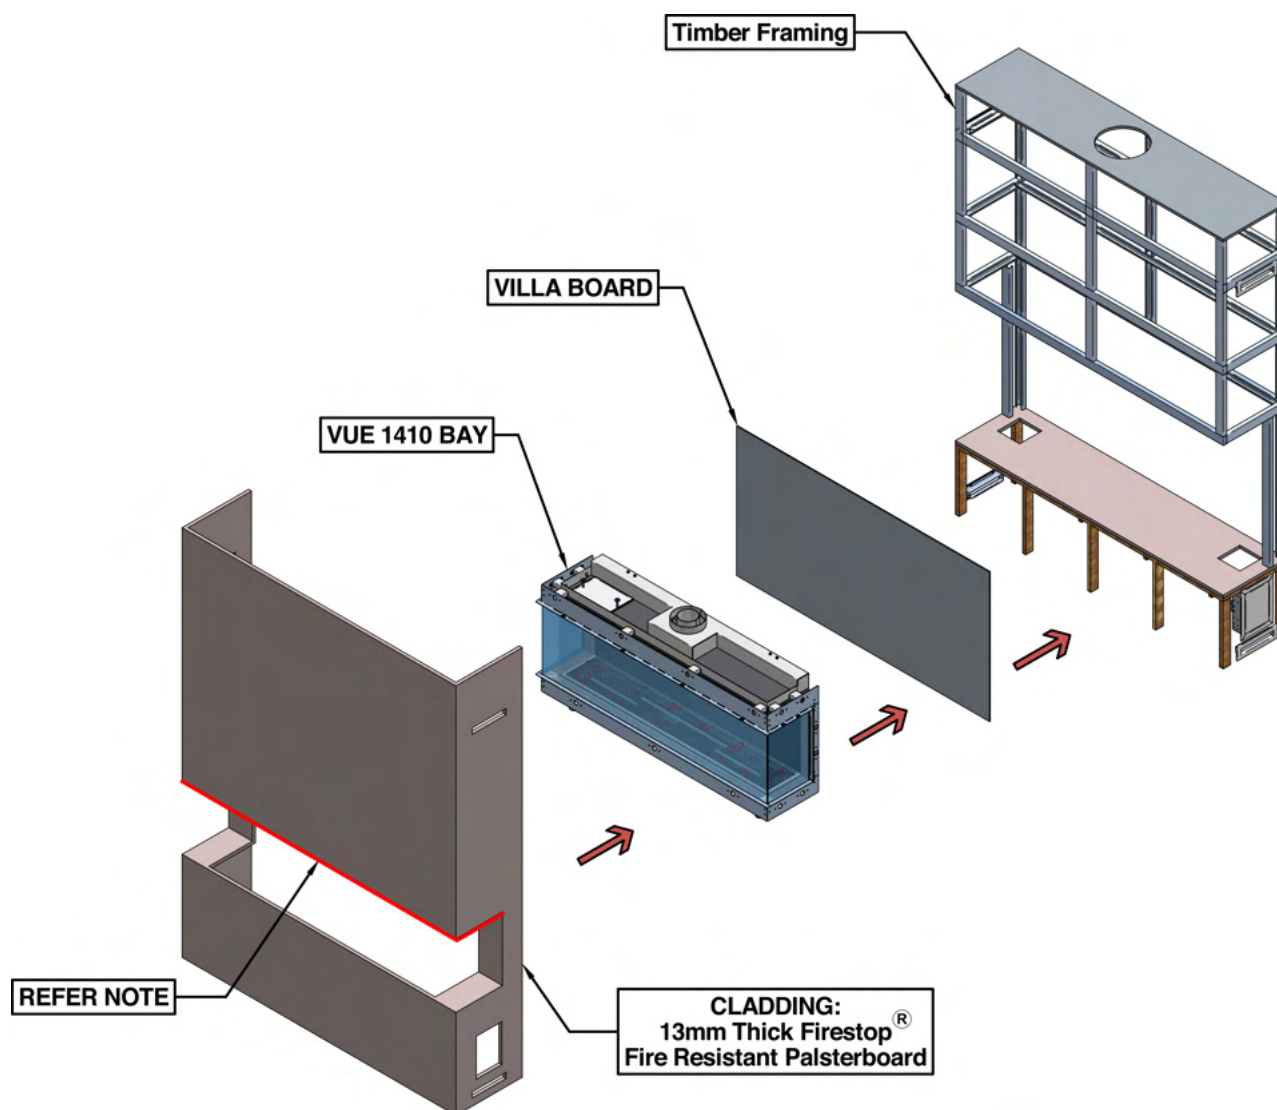


Figure 1.7 (Cladding Material)

Villa Board:

6mm Thick villa board of minimum spec of 1700 x 870 (ref. only) to be secured to the metal batten rear to heater unit.

Note:

A gap of 5mm needs to be left between the plasterboard and the top part of the firebox.
9mm Villa Board can be used as an alternative approved cladding material.


VUE 1410 BAY

METAL FRAME

Metal framing part details; which includes control panel (x1), vent (x4), base board, villa board to back of the heater unit and metal infills.


Cladding need to be build around the frame having the heater unit inside the cavity of the metal frame.

Please refer to Pg. 11 for specification to build the metal frame, dimensions specified are of minimum requirements.

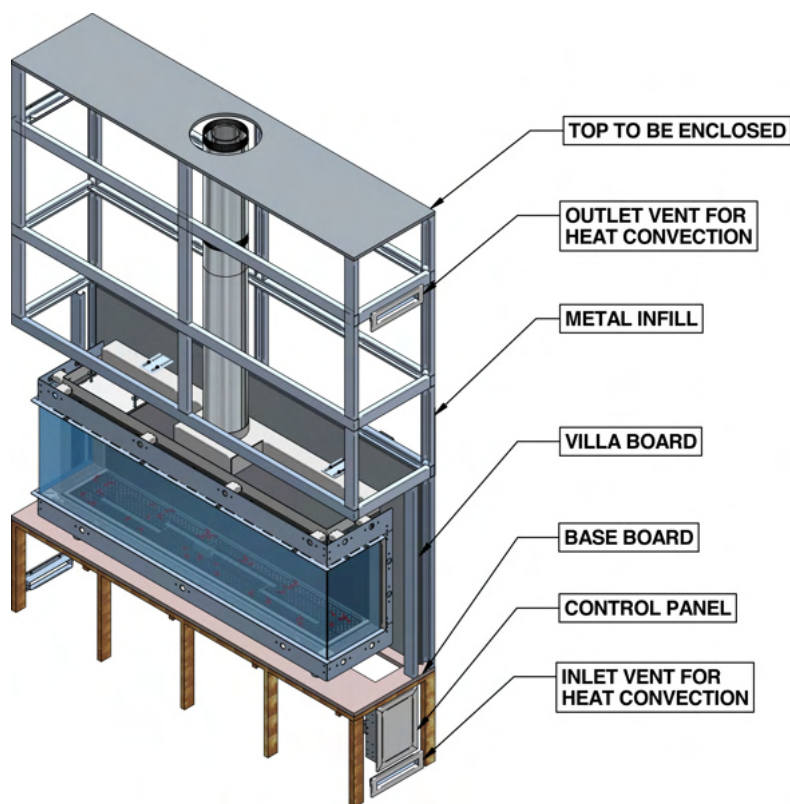


BASE BOARD:

Base board need to have minimum opening of 200x150mm on each side as specified, with minimum thickness of 18mm.

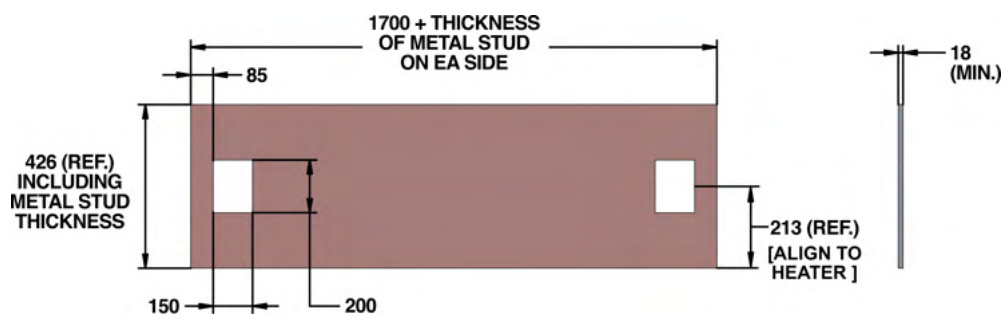

TOP ENCLOSURE:


Top enclosure need to have opening of diameter 270mm in alignment for flue line as specified.

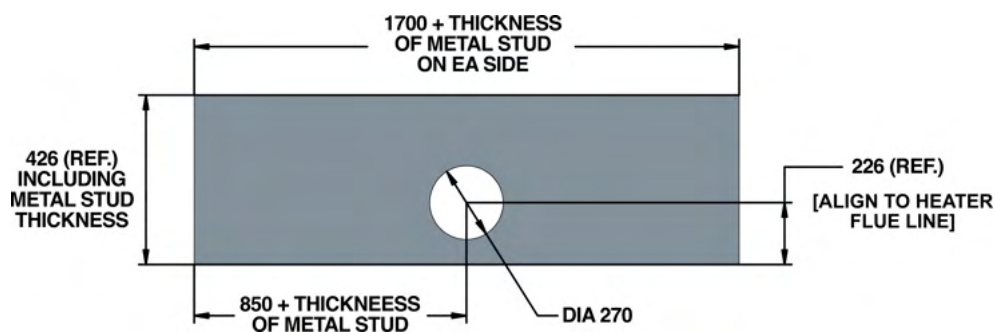

VUE 1410 BAY

METAL FRAME

Figure 1.8 (Metal framing)

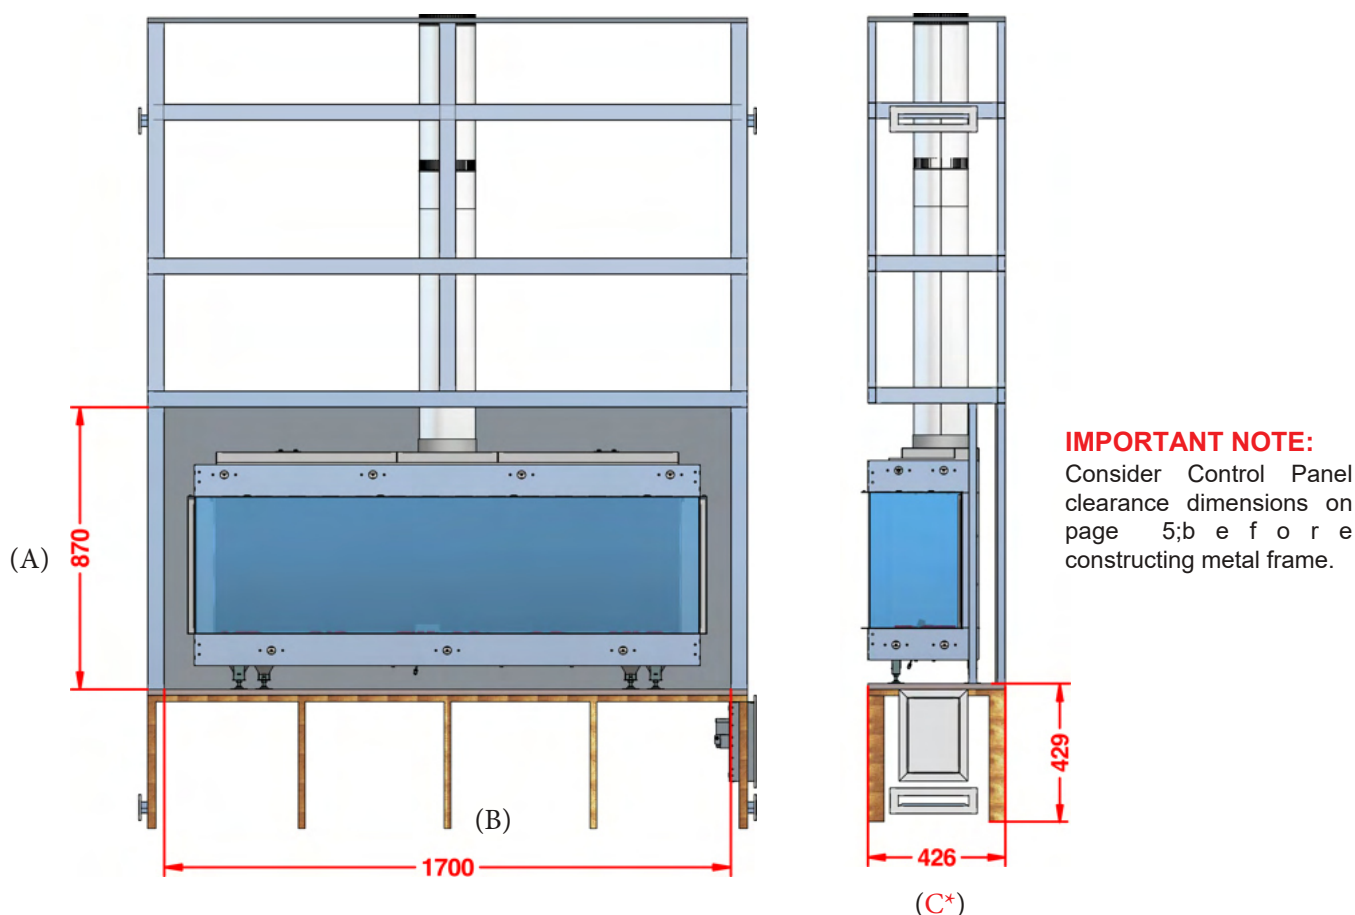

CLEARANCE TO COMBUSTIBLES

Metal Stud Frame					
FOR METAL STUD FRAME, UNIT MUST BE IN PLACE					
Fireplace Dimensions			Clearance to the inside of the metal stud		
In mm			Depth Clearance		
			Unit Height +90mm top	Unit Width +150mm either side to internal side of metal stud	Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +6mm Villa Board +50mm air gap to unit
H	W	D	A	B	C*
780	1400	345	870	1700	426

Important:

Unit needs to be in place while building into metal studs. Otherwise the measurements must be bigger. The clearances to combustibles is 500mm to the top of the unit and 250mm on either side.

***If planning to install TV above the fireplace, please refer to metal framing Option 2.

Note:

Please refer to Pg. 2 for specifications regarding Vents and pg. 4 for Control Panel specifications.

VUE 1410 BAY

METAL FRAMING OPTION 2 - TV CLEARANCE SPECIFICATION

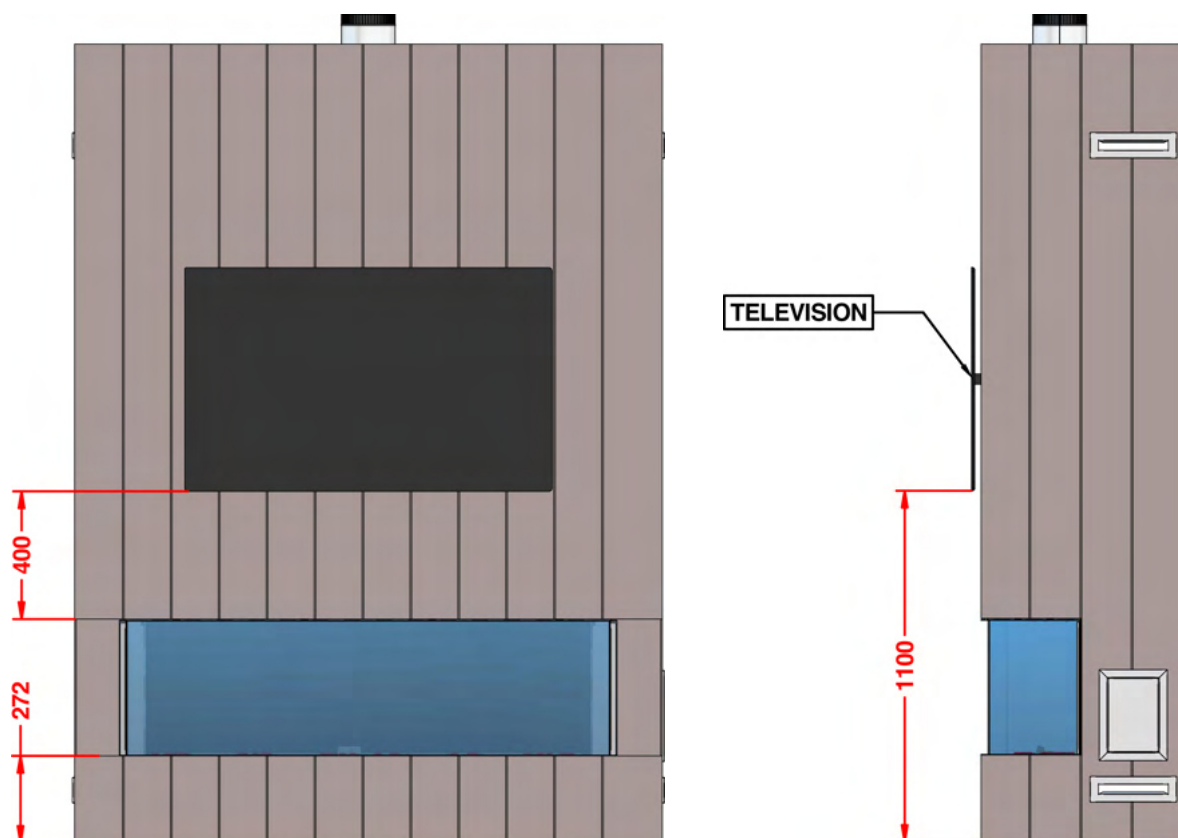



Figure 1.8 (Metal Framing Option-2 Clearance from Unit to TV)

NOTE:

Please refer to pg. 15 for building the metal framing to accommodate TV about 1.1m from the ground level.

Maintain the minimum clearance of 400mm as shown above, between the heater top fascia cladding to TV.

Maintain the minimum clearance of 300mm from heater top fascia cladding to combustible shelves. Please refer pg 4 for more info.

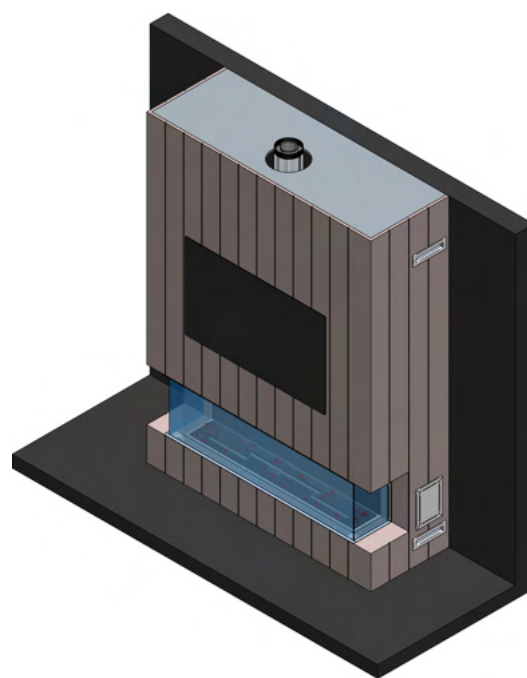

VUE 1410 BAY

METAL FRAMING OPTION 2 - CLADDING MATERIAL

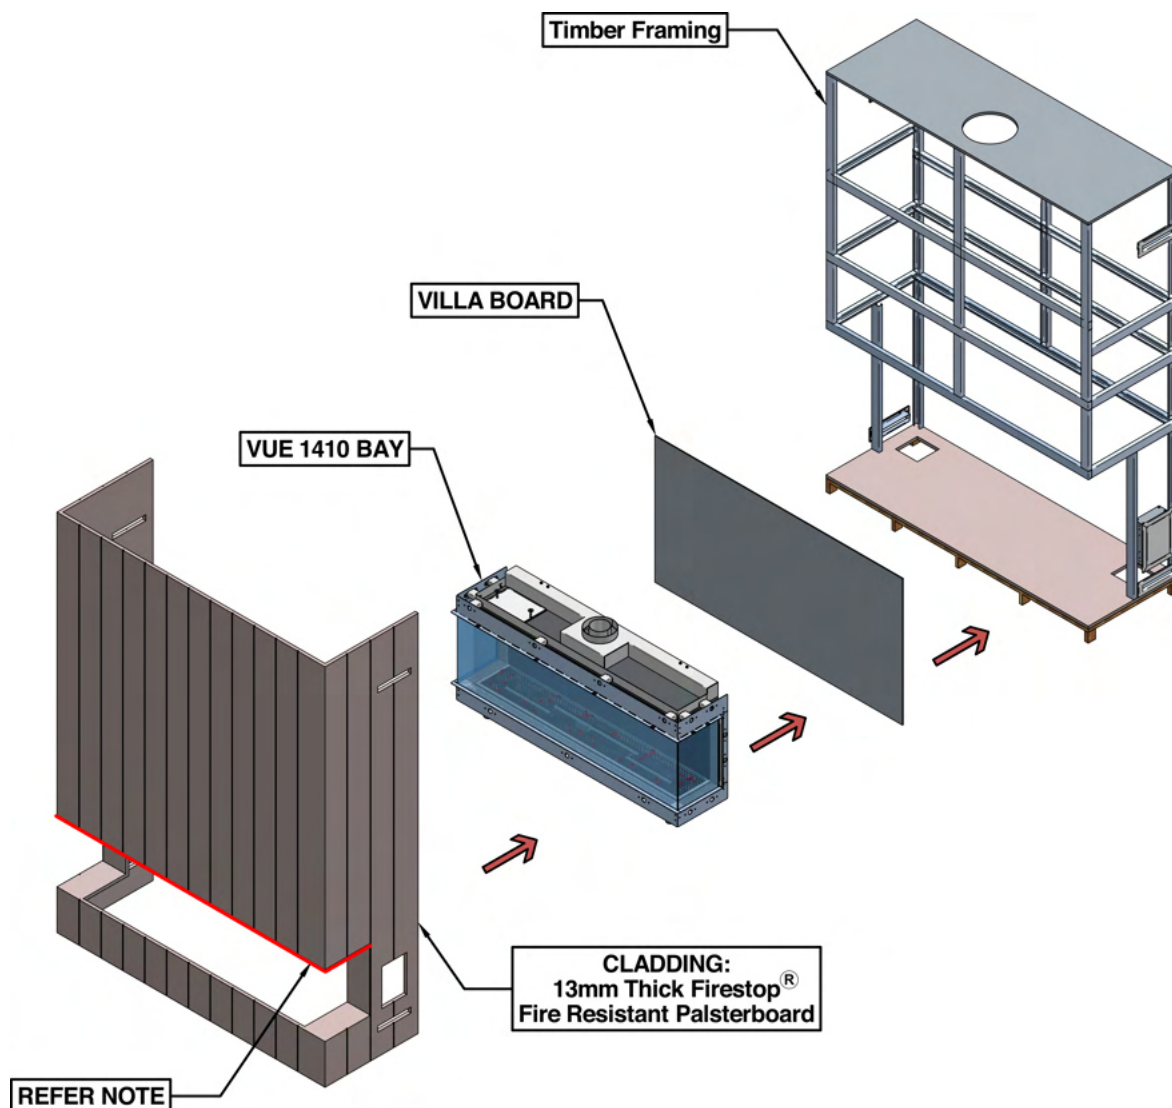


Figure 1.7 (Cladding Material)

Villa Board:

6mm Thick villa board of minimum spec of 1700 x 870 (ref. only) to be secured to the metal batten rear to heater unit.

Note:

A gap of 5mm needs to be left between the plasterboard and the top part of the firebox.
9mm Villa Board can be used as an alternative approved cladding material.


VUE 1410 BAY

METAL FRAME- OPTION 2

Metal framing part details; which includes control panel (x1), vent (x4), base board, villa board to back of the heater unit and metal infills.


Cladding need to be build around the frame having the heater unit inside the cavity of the metal frame.

Please refer to Pg. 15 for specification to build the metal frame, dimensions specified are of minimum requirements.

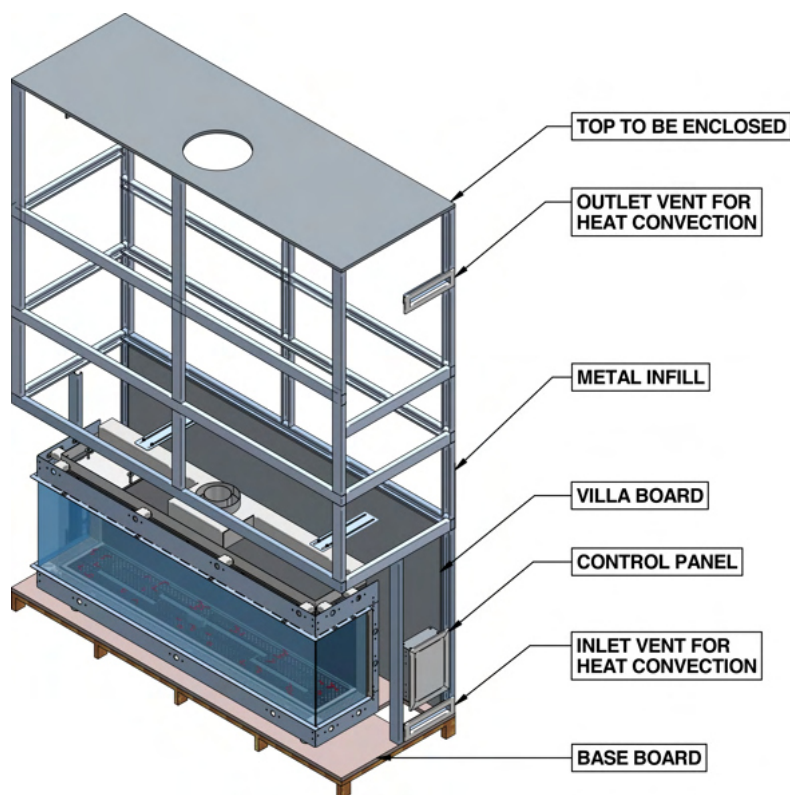


BASE BOARD:

Base board need to have minimum opening of 200x150mm on each side as specified, with minimum thickness of 18mm.

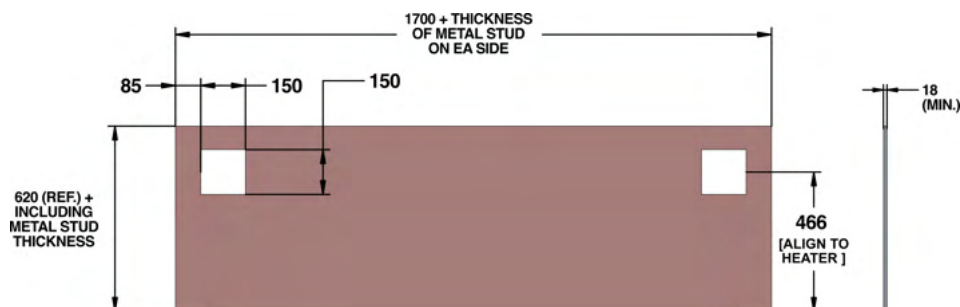

TOP ENCLOSURE:


Top enclosure need to have opening of diameter 270mm in alignment for flue line as specified.

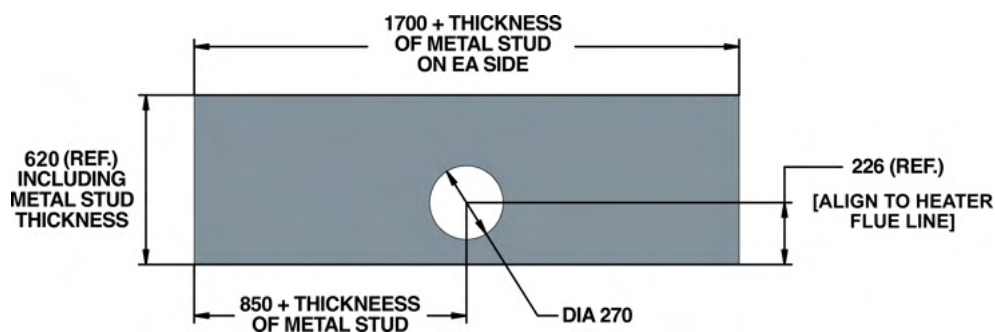

VUE 1410 BAY

METAL FRAME - OPTION 2

Figure 1.8 (Metal framing)

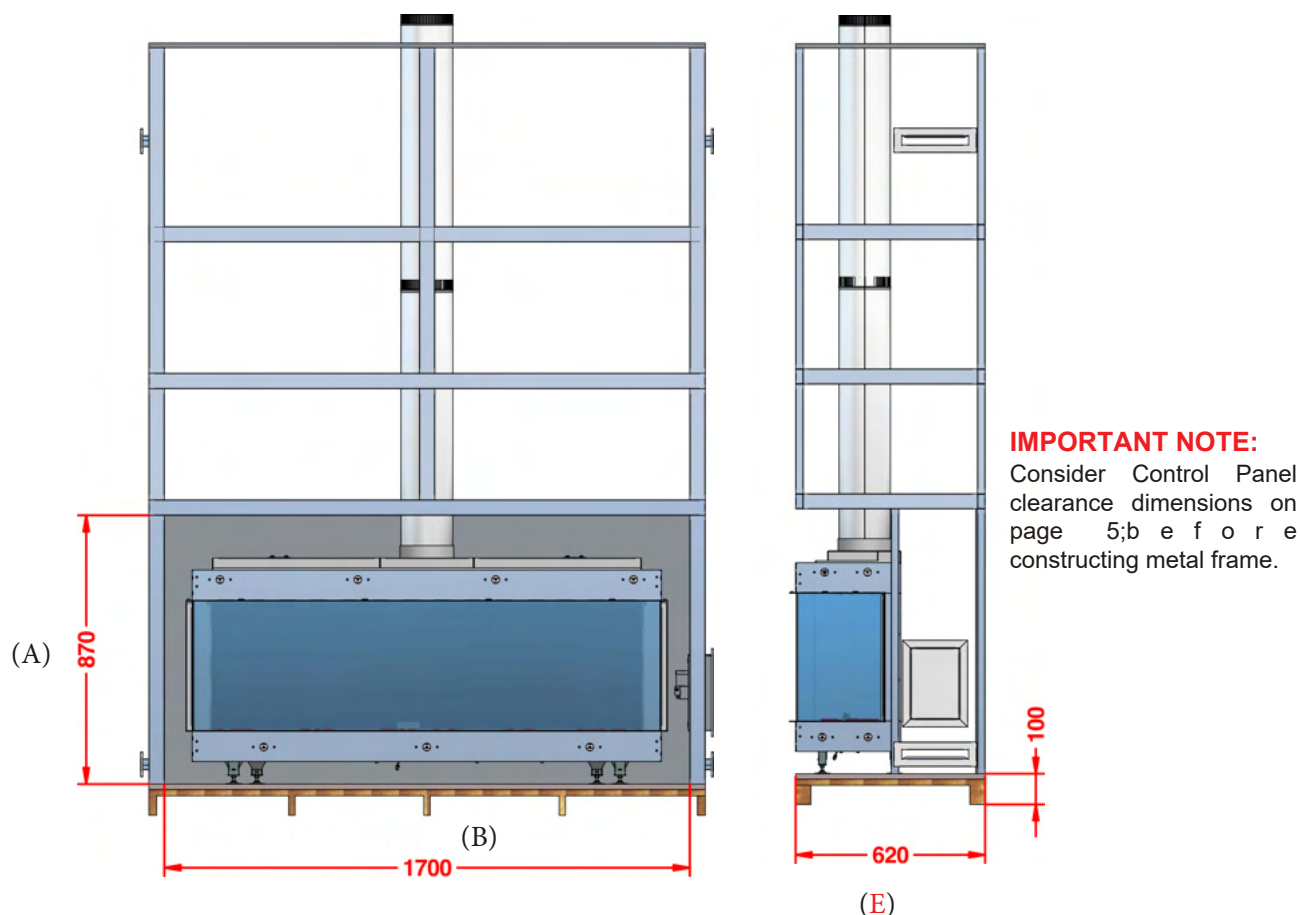

CLEARANCE TO COMBUSTIBLES

Fireplace Dimensions			Metal Stud Frame		
In mm			FOR METAL STUD FRAME, UNIT MUST BE IN PLACE		
			Clearance to the inside of the metal stud		
			Unit Height +90mm top	Unit Width +150mm either side to internal side of metal stud	Depth Clearance Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +6mm Villa Board +244mm air gap to unit
H	W	D	A	B	E
780	1400	345	870	1700	620

Important:

Unit needs to be in place while building into metal studs. Otherwise the measurements must be bigger. The clearances to combustibles is 500mm to the top of the unit and 250mm on either side.

Note:

Please refer to Pg. 2 for specifications regarding Vents and pg. 4 for Control Panel specifications.

VUE 1410 BAY

REGULATORY COWL LOCATIONS

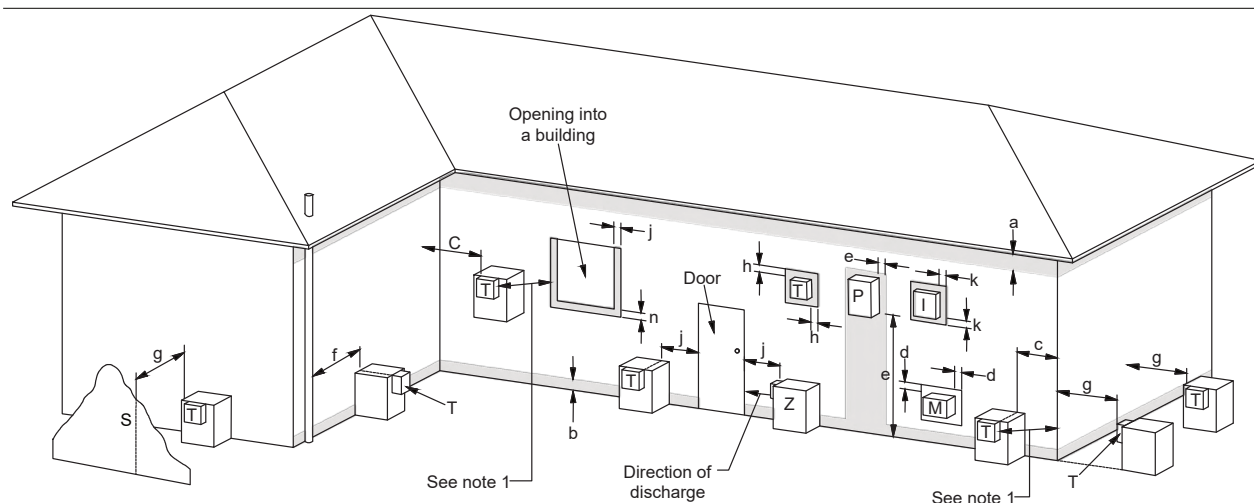


Figure 2.0 (Location of flue terminals of balanced flue, room-sealed, fan-assisted or outdoor appliances)

Ref.	Item	Minimum clearances mm	
		Natural draught	Fan assisted
a	Below eaves, balconies and other projections:		
	For appliances up to 50MJ/h input	300	200
	For appliances over 50MJ/h input	500	300
b	From the ground, above a balcony or other surface*	300	300
c	From a return wall or external cover*	500	300
d	From a gas meter (M) (see Note 5) (see Clause 5.11.5.9 for vent terminal location of regulator) (see Table 6.7 for New Zealand requirements)	1000	1000
e	From an electricity meter or fuse box (P)* (see Note 5)	500	500
f	From a drain pipe or soil pipe	150	75
g	Horizontally from any building structure* or obstruction facing a terminal	500	500
h	From any other flue terminal, cowl, or combustion air intake*	500	300
j	Horizontally from an openable window, door, non-mechanical air inlet, or any other opening into a building with exception of sub-floor ventilation:		
	Appliances up to 150 MJ/h input*	500	300
	Appliances over 150 MJ/h input up to 200 MJ/h input*	1500	300
	Appliances over 200 MJ/h input up to 250 MJ/h input*	1500	500
	Appliances over 250 MJ/h input*	1500	1500
k	All fan-assisted appliances, in the direction of discharge	-	1500
	From a mechanical air inlet, including a spa blower	1500	1500
n	Vertically below an openable window, non-mechanical air inlet, or any other opening into a building with the exception of sub-floor ventilation:		
	For space heaters up to 50 MJ/h input	150	150
	For other appliances up to 50 MJ/h input	500	500
	For appliances over 50 MJ/h input and up to 150MJ/h input	1000	1000
	For appliances over 150 MJ/h input	1500	1500

Legend:

I = Mechanical air inlet M = Gas meter
P = Electricity meter or fuse box S = Structure
T = Flue terminal
Z = Fan-assisted appliance only

Shading indicates prohibited area for flue terminals



Notes:

- 1) Where dimensions c, j, k cannot be achieved an equivalent horizontal distance measured diagonally from the nearest discharge point of the terminal to the opening may be deemed by the Technical Regulator to comply.
- 2) See Clause 6.9.4 for restrictions on a flue terminal under a covered area.
- 3) See Figure J3 (from AS/NZS 5601) for minimum clearances required from a flue terminal to an LPG Gas cylinder. A flue terminal is considered to be a source of ignition.
- 4) For minimum clearances not addressed above acceptance should be obtained from the Technical Regulator.
- 5) Minimum clearances d and e also apply to any combustion air intake openings of appliances.

* Unless appliance is certified for closer installation
• Prohibited area below electricity meter or fuse box extends to ground level

VUE 1250 BAY

CLADDING MATERIAL

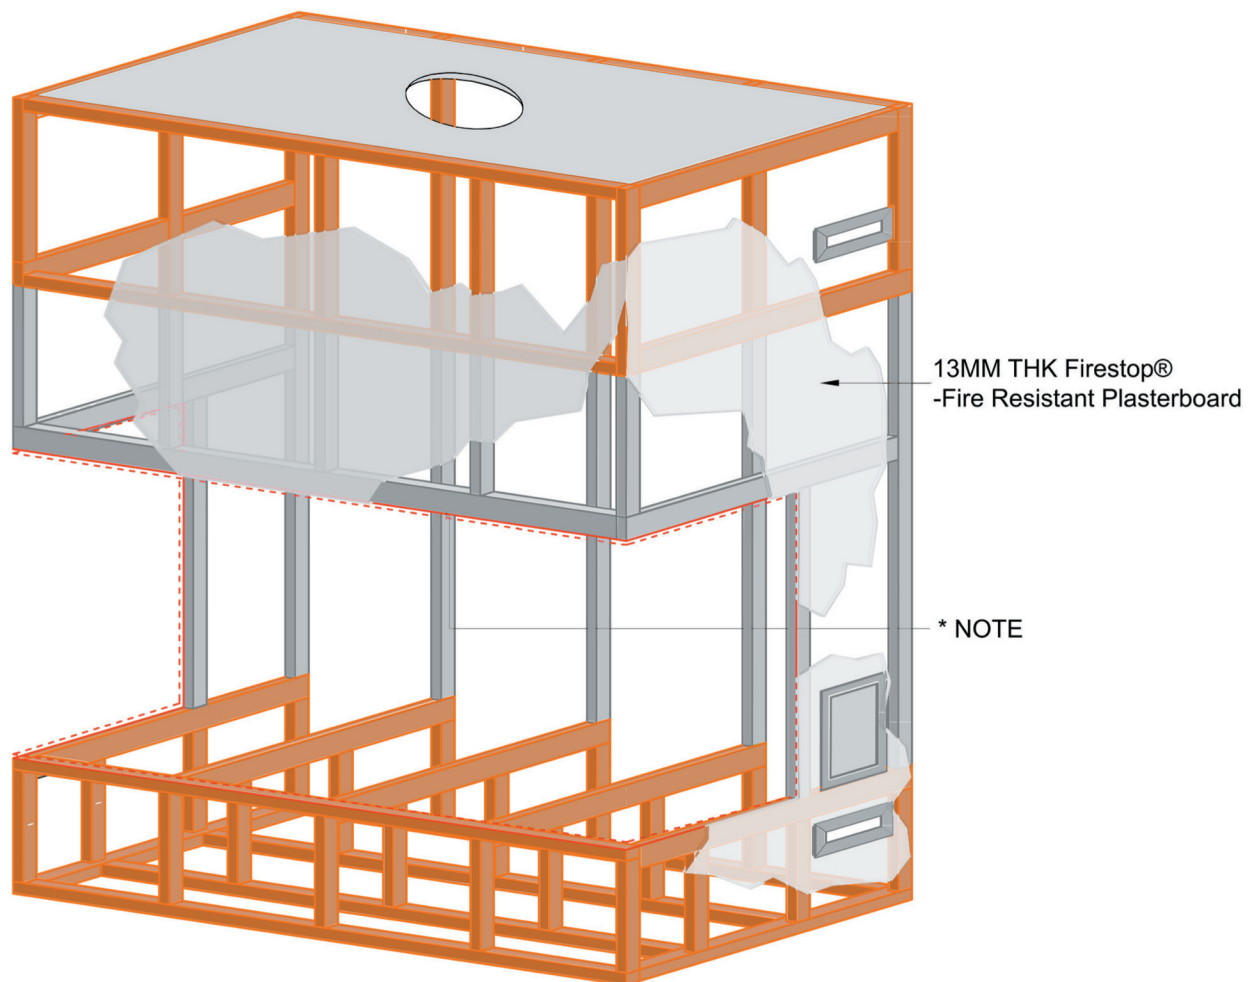


Figure 1.7 (Cladding Material)

Note:

A gap of 4mm needs to be left between the villa board and the top part of the firebox.
9mm Villa Board can be used as an alternative approved cladding material

VUE 1250 BAY

TIMBER FRAME

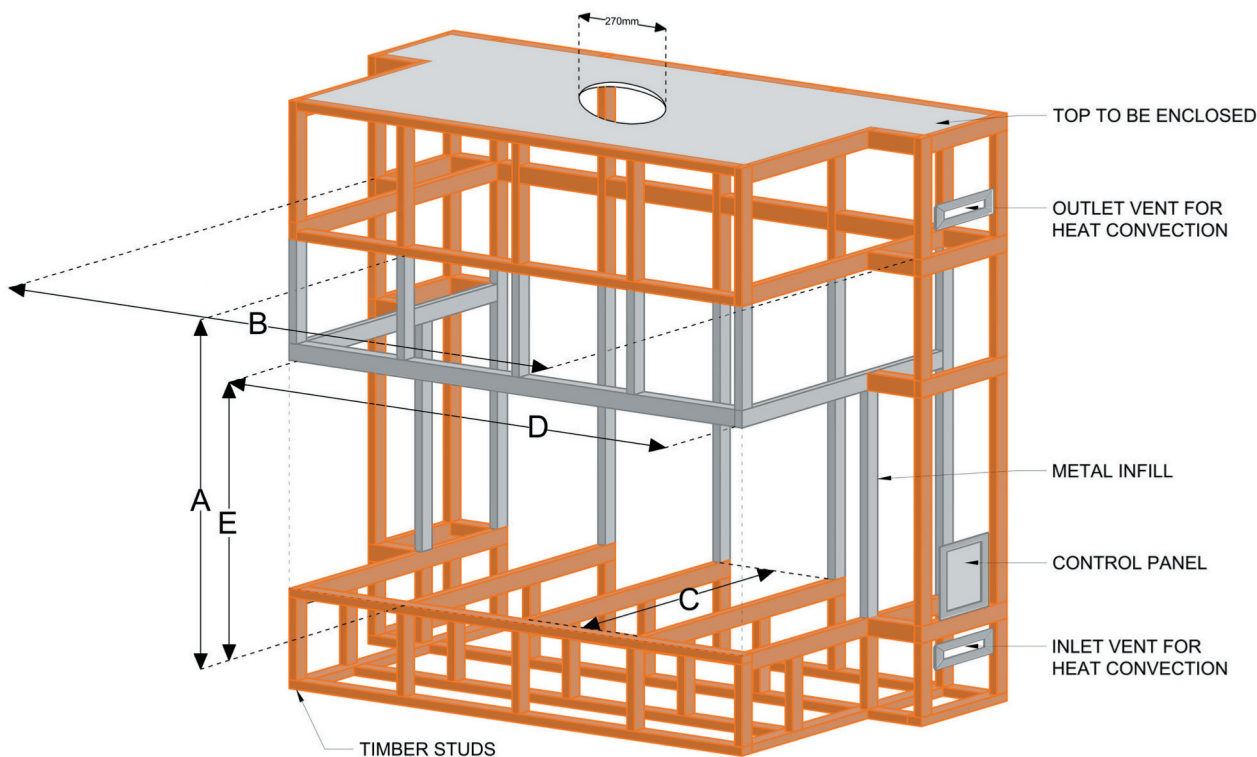


Figure 1.8 (Timber framing)

CLEARANCE TO COMBUSTIBLES

Unit Dimensions			Timber Frame			Metal Studs Infills to be installed after Unit is in place (Clearance between unit and metal stud infill)		Option for smaller depth clearance: Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +13mm Firestop Board + 50mm air gap to unit
In mm			Clearance to Combustibles in mm			Installation dimensions in mm		
			Unit Height +500mm top	Unit Width +250mm each side	Unit Depth +250mm to back	Unit Width +50mm either side	Unit Height +150mm top	Unit Depth + 88mm
H	W	D	A	B	C	D	E	C*
665	1260	380	1165	1760	630	1360	815	468

Note:

Please refer to Pg. 3 for specifications regarding Vents and pg. 5 for Control Panel specifications.

VUE 1250 BAY

METAL FRAME

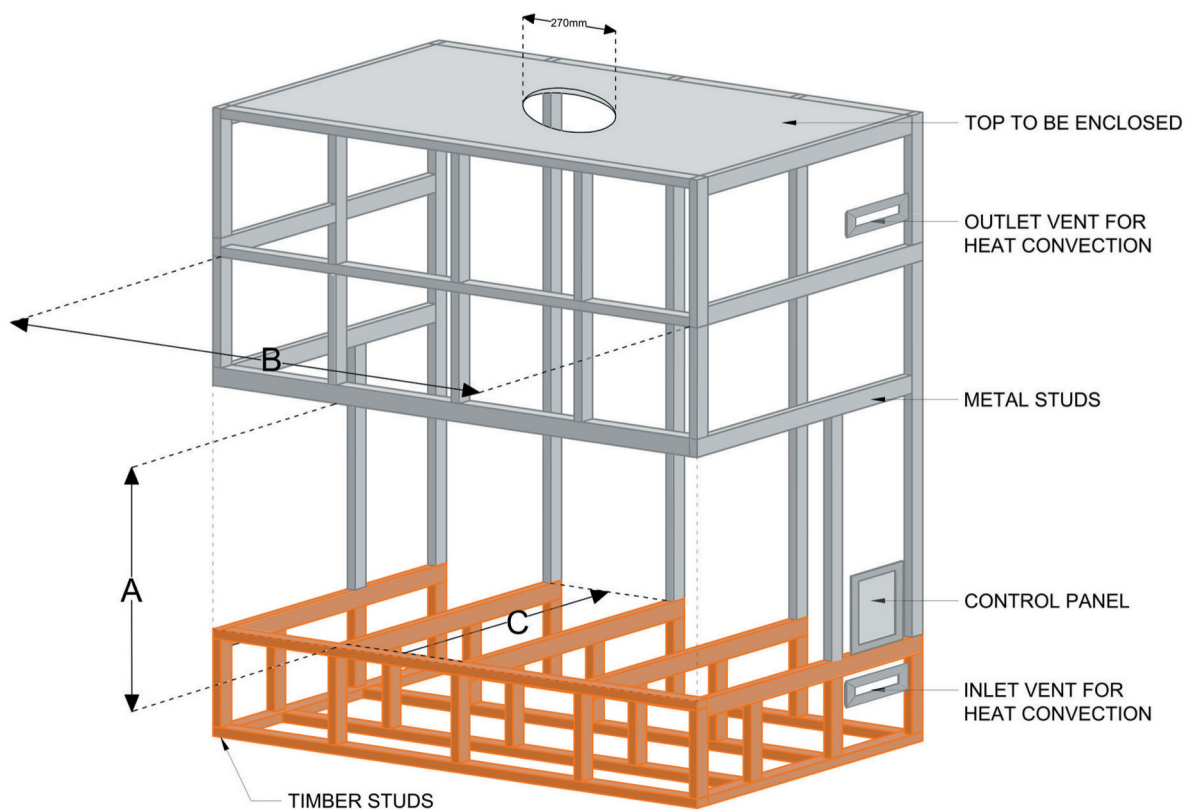


Figure 1.9 (Metal framing)

CLEARANCE TO COMBUSTIBLES

Unit Dimensions			Metal Stud Frame		
In mm			FOR METAL STUD FRAME, UNIT MUST BE IN PLACE		
			Clearance to the inside of the metal stud		
			Unit Height +50mm top	Unit Width +150mm either side to internal side of metal stud	Depth Clearance Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +13mm Firestop Board +50mm air gap to unit
H	W	D	A	B	C
665	1260	380	715	1560	468

Important:

Unit needs to be in place while building into metal studs. Otherwise the measurements must be bigger.
The clearances to combustibles is 500mm to the top of the unit and 250mm on either side.

Note:

Please refer to Pg. 2 for specifications regarding Vents and pg. 4 for Control Panel specifications.

VUE 1250 BAY

REGULATORY COWL LOCATIONS

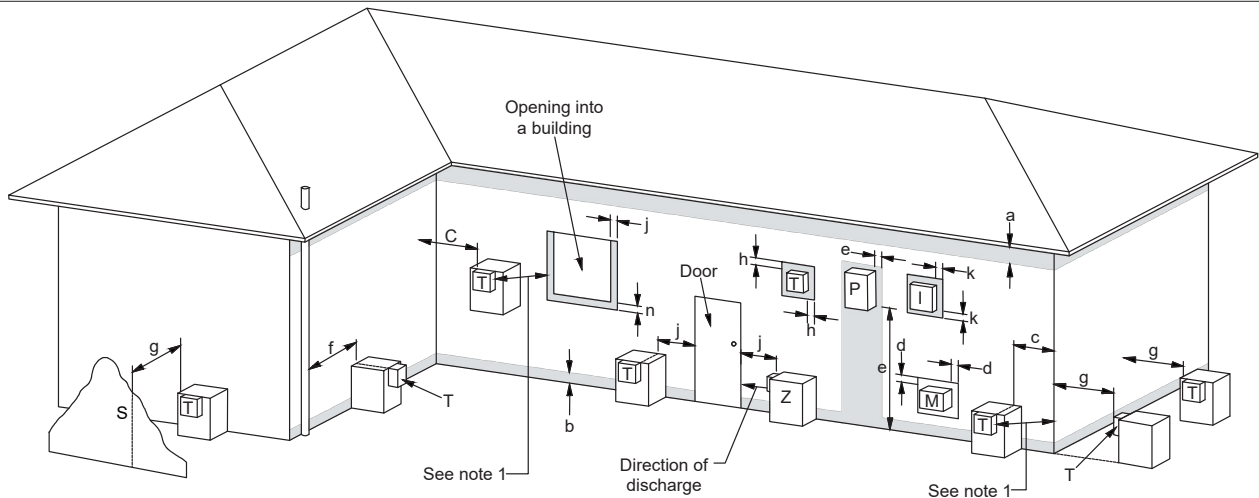


Figure 2.0 (Location of flue terminals of balanced flue, room-sealed, fan-assisted or outdoor appliances)

Ref.	Item	Minimum clearances mm	
		Natural draught	Fan assisted
a	Below eaves, balconies and other projections:		
	For appliances up to 50MJ/h input	300	200
	For appliances over 50MJ/h input	500	300
b	From the ground, above a balcony or other surface*	300	300
c	From a return wall or external cober*	500	300
d	From a gas meter (M) (see Note 5) (see Clause 5.11.5.9 for vent terminal location of regulator) (see Table 6.7 for New Zealand requirements)	1000	1000
e	From an electricity meter or fuse box (P)* (see Note 5)	500	500
f	From a drain pipe or soil pipe	150	75
g	Horizontally from any building structure* or obstruction facing a terminal	500	500
h	From any other flue terminal, cowl, or combustion air intake*	500	300
j	Horizontally from an openable window, door, non-mechanical air inlet, or any other opening inot a building with exception of sub-floor ventilation:		
	Appliances up to 150 MJ/h input*	500	300
	Appliances over 150 MJ/h input up to 200 MJ/h input*	1500	3 0 0
	Appliances over 200 MJ/h input up to 250 MJ/h input*	1500	5 0 0
	Appliances over 250 MJ/h input*	1500	1500
k	All fan-assisted appliances, in the direction of discharge	-	1500
n	From a mechanical air inlet, including a spa blower	1500	1500
	Vertically below an openable window, non-mechanical air inlet, or any other opening inot a building with the exception of sub-floor ventilation:		
	For space heaters up to 50 MJ/h input	150	150
	For other appliances up to 50 MJ/h input	500	500
	For appliances over 50 MJ/h input and up to 150MJ/h input	1000	1000
	For appliances over 150 MJ/h input	1500	1500

Legend:

I = Mechanical air inlet M = Gas meter
 P = Electricity meter or fuse box S = Structure
 T = Flue terminal
 Z = Fan-assisted appliance only
 Shading indicates prohibited area for flue terminals

Notes:

- 1) Where dimensions c, j, k cannot be achieved an equivalent horizontal distance measured diagonally from the nearest discharge point of the terminal to the opening may be deemed by the Technical Regulator to comply.
- 2) See Clause 6.9.4 for restrictions on a flue terminal under a covered area.
- 3) See Figure J3 (from AS/NZS 5601) for minimum clearances required from a flue terminal to an LPG Gas cylinder. A flue terminal is considered to be a source of ignition.
- 4) For minimum clearances not addressed above acceptance should be obtained from the Technical Regulator.
- 5) Minimum clearances d and e also apply to any combustion air intake openings of appliances.

* Unless appliance is certified for closer installation
 • Prohibited area below electricity meter or fuse box extends to ground level